

DBS MULTIMEDIA T9 With GPRS



- ✿ It is The Multimedia Fingerprint Time&Attendance and Access Control Identification Terminal which adopts advanced North Korean fingerprint algorithm nowadays
- ✿ Fingerprint, card, password, fingerprint+card, fingerprint+password and taking pictures by camera for high security and precision
- ✿ RS232, RS485, TCP/IP, ADSL, WG and USB and even GPRS (optional) communication
- ✿ Simple IP Camera function and can connect to external proximity or Mifare card reader.
- ✿ Upload data to Server automatically once wipe card or pres finger
- ✿ Menu language: English, French, Spanish, Czech, Indonesian, Portuguese, Turkish and so on
- ✿ TFT 3.5 inches LCD for enjoying, Six work modes, Slided notice, Advertisement and Music play


2 Standalone

For Demo only




2 TCP/IP Environment

For Demo only

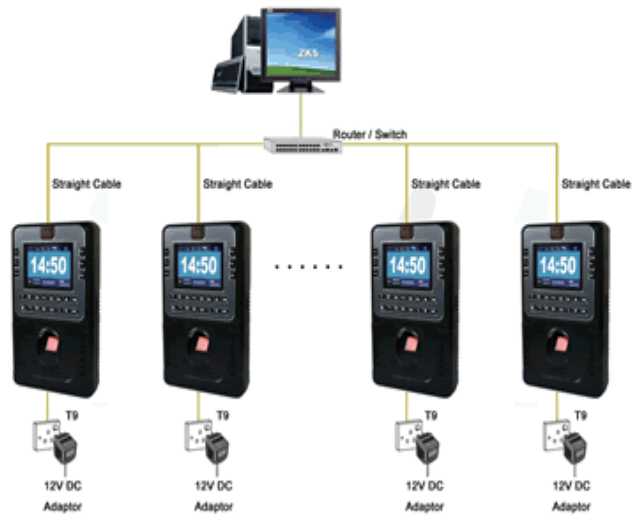

2 Door Access Control

For Demo only

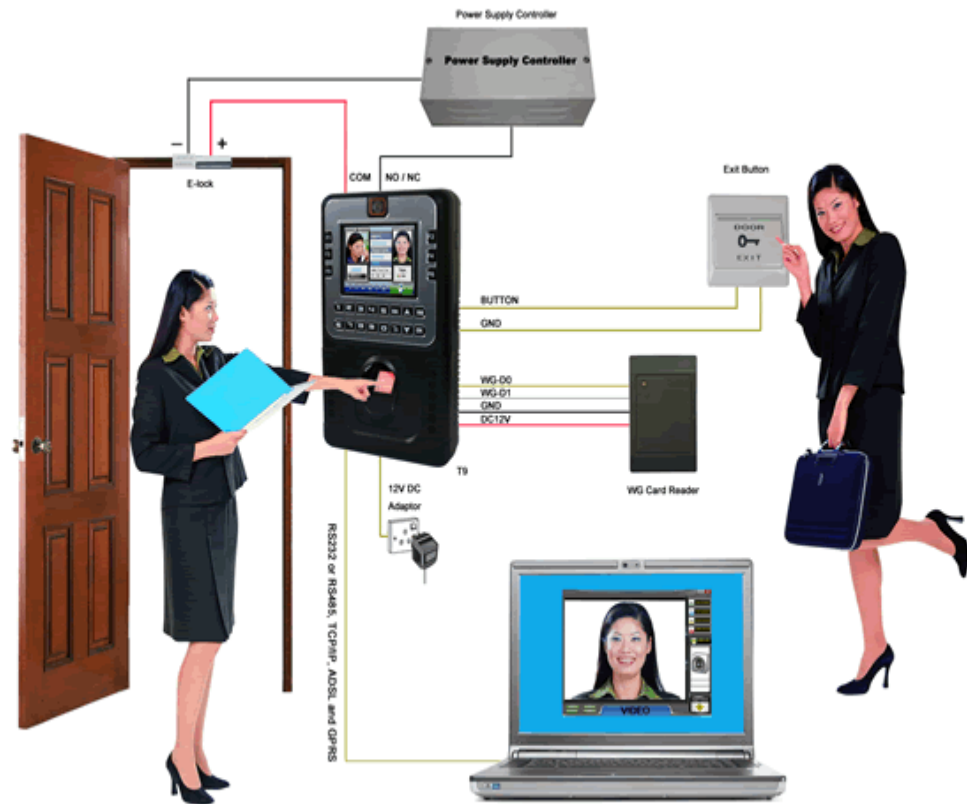

IP Camera applications. High identification rate is less than one second; Linux operating system and ARM9 hardware platform; 3.5 inches color LCD, showing personnel image, advertising and notice and so on; Inimitable and fancy design; Particular six kinds of work codes check on work accurate attendance advantageously. It is a kind of ideal product for high end consumption.

Fingerprint templates	3,000
Maximum capacity of register	one person can register 10 fingers.
Memory capacity	60MB (can be extended to 1G)
Amount bytes of one fingerprint	2 KB
Period of data	Keep data for 3 years when no current
LCD	3.5-inch TFT color, 320*240 Pixels
Verification mode:	1: N, 1:1
FAR	<0. 0001%
FRR	<0. 01%
Response time	<0. 7 second
Communication	RS232/ RS485, TCP/IP, U-Disk, Weigand 26/34, ADSL and GPRS (optional)
External card Reader (optional)	Mifare one or Proximity Card
Distance	2. 5-10 cm (Mifare one card), 2. 5-15cm (proximity card)
Video camera	1. 3 million pixels, HDTV Color Camera
Show	Staff and fingerprint images, time, ID number, Name etc.
Work mode	Fingerprint, card, password, fingerprint+card, fingerprint+password
Languages and voices	English, French, Spanish, Arabic, Farsi, Portuguese and so on.
Save function	Automatical dormancy for saving
External function (access control)	Connect to external E-lock, external EM/Mifare card reader and indicator light
Time Zone, Group, Unlock Combination	Supports 50 time zones, 5 groups and 10 unlock combinations
Multimedia functions	Music, slide advertisement, notice etc.
Size	232*138*53(mm)
Weight	2.5 kg, hang installation
Power supply	DC12V, 25W, 2A (AC 100V to 240 V, 50 to 60 Hz)
Backup battery (optional)	3.5 hours
Warranty of period	24 months
Temperature and humidity	0 - 45, 20%-80%
Applications	Office, star-hotel, villa, bank, government, top grade community etc.

